www.jiecang.com

JIECANG

Quartzs3.0

JC35TS-S112R



TECHNOLOGY
DRIVES INTELLIGENT LIFE

JIECANG

Data sheet

JC35TS-S112R

- The Quartz 3.0 features a special tube type without hole design, dual-motor lifting system, and is a derivative design of the single-motor Quartz2.0. Compared to the 2.0 version, it eliminates the bottom crossbeam, providing better strength, noise reduction, and stability while freeing up leg space. It is suitable for various scenarios such as offices and homes.
- The appearance color can be customized, and there are two configurations available: glass tabletop and wooden tabletop.
- Equipped with a clever drawer design for convenient storage.
- The lifting function is controlled by side buttons and comes with Type-A and Type-C charging ports.
- Optional side desk frame hooks are available to enhance storage functionality.





Features

- Load: 800N
- Speed: 25mm/s
- Noise: ≤50dB
- Maximum lateral force: 100N.m
- Standard mounting distance: 685mm
- Standard stroke: 475mm
- Outer tube dimensions: 66x66mm
- Motor: JIECANG high-power motor
- Surface: Powder coating, Standard color: white, black

Usages


- Working cycle: 10%; work for 1 minute and rest for 9 minutes.
- Usage environment: Indoor use only.
- Storage and transportation temperature: -10°C~70°C.


Technical specifications

Model	Load (N)	Self-lock (N)	Rated load current (A)	Maximum speed no load ~ rated load (mm/s)	Duty cycle	Stroke (mm)	Min. height (mm)
JC35TS -S112R	800	1200	4	25	10%	475	685

Dimensions


Glass version

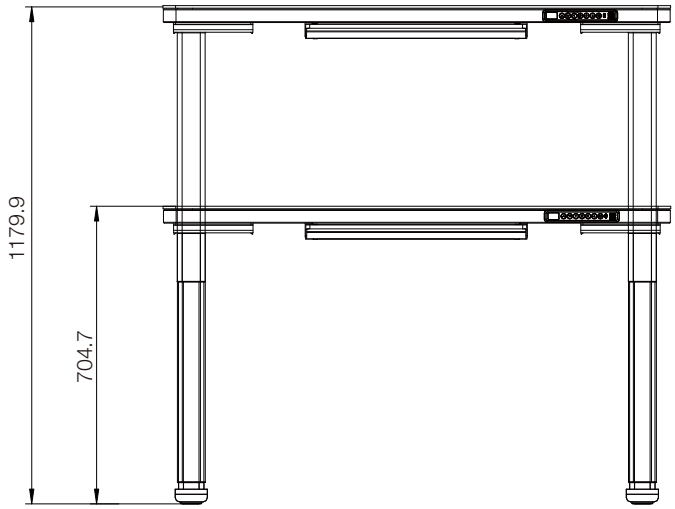


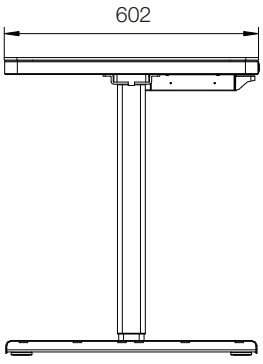




Wooden version

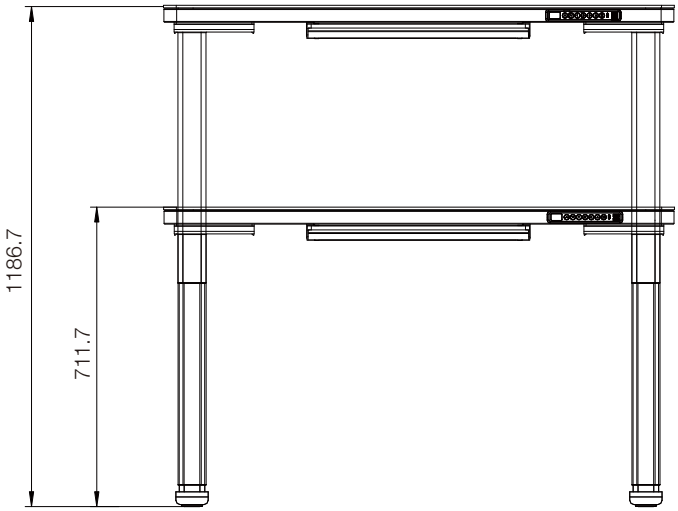

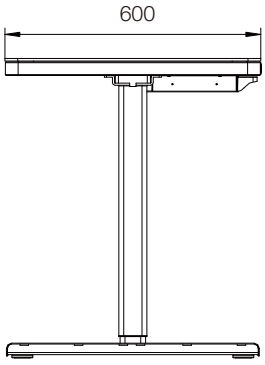

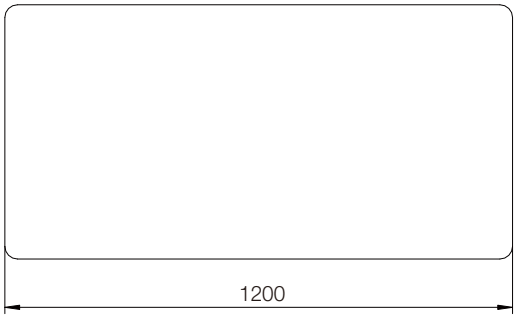

Ordering Key

JC35TS – S112R – 447– 419 – 0 – HC – 05 – 0 – 0

- Special specifications for columns
- Optional features
- Caster code
- Color code
- Side bracket code
- Frame code
- Foot code
- Column code
- Lifting table series code