www.jiecang.com

JIECANG

Odette2.0 Standing Desk Solution

JC35TF-DC2R



TECHNOLOGY
DRIVES INTELLIGENT LIFE

JIECANG

Data sheet

Odette2.0

- Odette2.0 is a standing desk solution, which can be widely used at home, office and commercial environments.
- Minimalist aesthetics, elaborate design, innovative modeling to match different application scenarios.
- Lifting system structure is simple, embedded hand set easy to control the lifting.
- Four legs synchronous stability, equipped with sensitive anti-collision function, safe lifting.



Features

- Rated load: 1000N
- Static loading: 2000N
- Max. speed: 32mm/s
- Noise: ≤ 53dB
- Frame size: 1600X800mm(Do not stretch)
- Height Range: 670-1120mm
- Surface: powder-coating
- Standard colors: black

Option

- Customized colors are acceptable


Usages

- Matching: JCHT35M9A handset, JCB35NH4 control box, table top of 1600mm × 800mm
- Duty cycle: S2-20min, 2 minutes continuous use followed by 18 minutes not in use
- Usage environment: Indoor
- Ambient temperature: -10℃~70℃


Technical specifications

Model	Rated load (N)	Static loading (N)	Maximum speed no load ~ rated load (mm/s)	Duty cycle	Stroke (mm)	Min. height (mm)
Odette2.0	1000	2000	32	20%	450	670


Performance curve

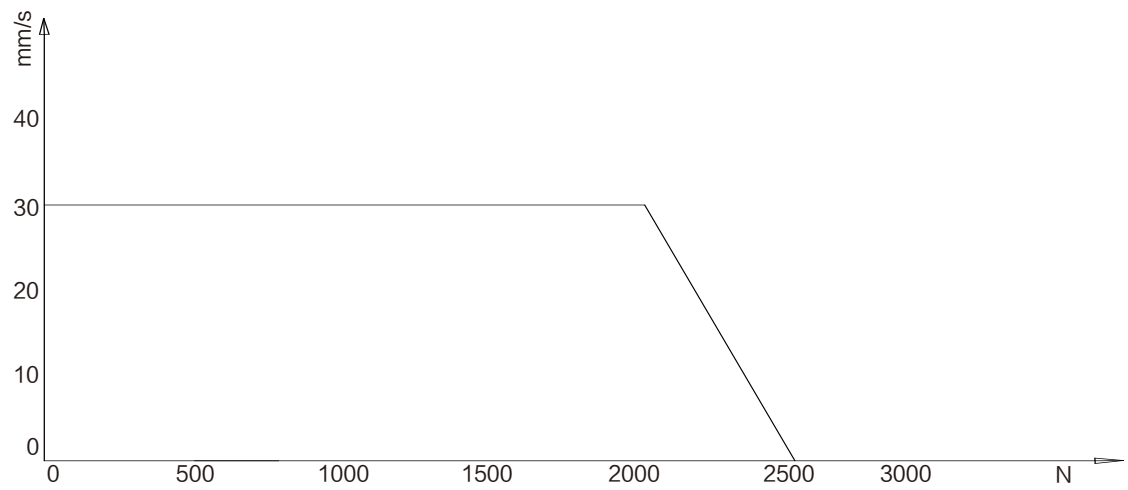

Dimensions

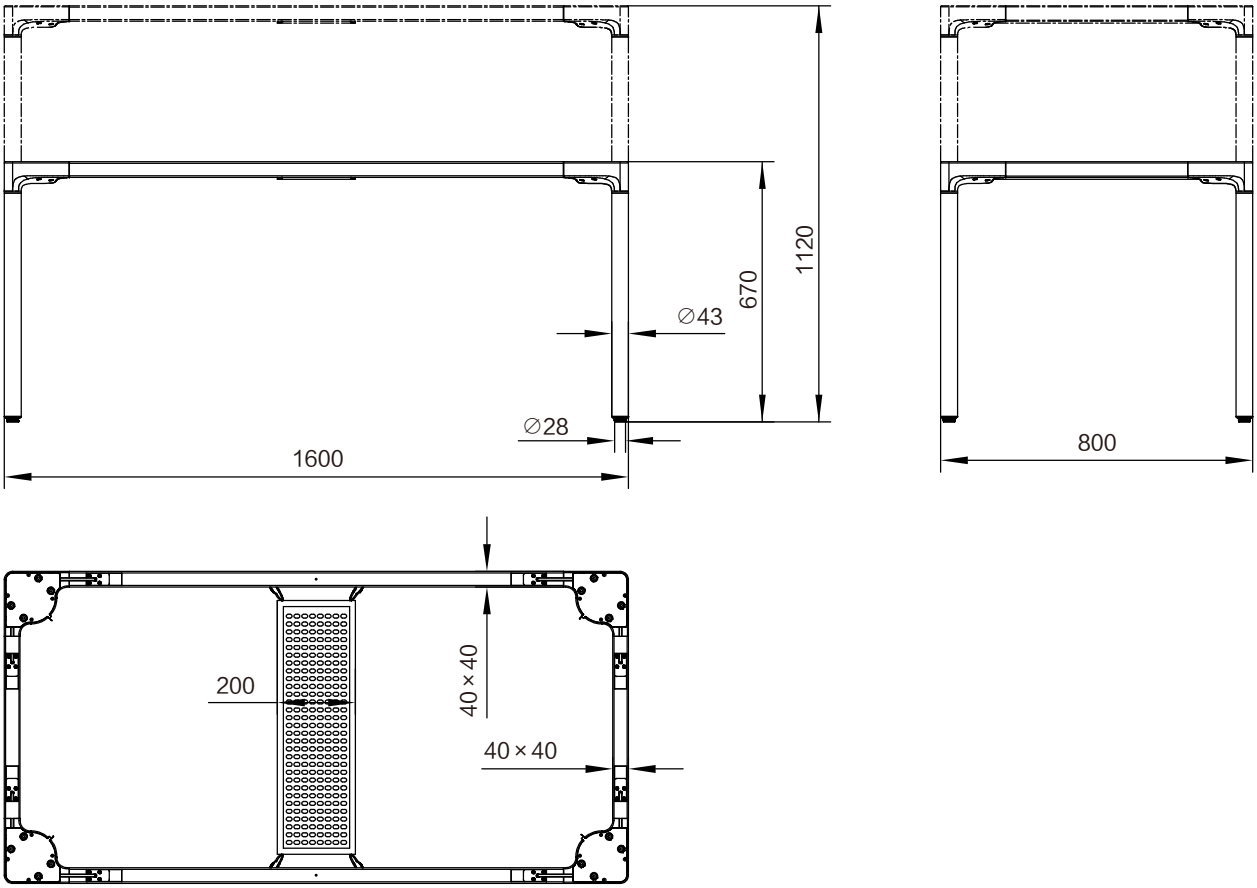

Ordering Key

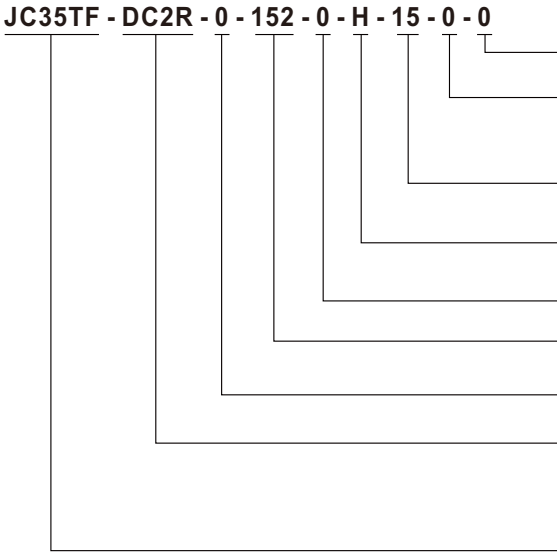

Special specification of column	
Optional function	01=column with welding plates, equipped with horizontal beam 02=desktop
Leveling stand code	15=Small foot glide 02=ET leveling stand
Color code	H=white B=Black S=silver
Side bracket code	107=JS36DR1Side panel
Frame code	152=TF frame 154=Bending frame
Table foot code	186=embedded reinforced desk foot 146=flat desk foot
Column code	DC2R=inverted pipe columns of 2-segments R13S=rectangular pipe columns of 3-segments
Lifting desk series code	JC35TS=2 columns JC35TT=3 columns JC35TF=4 columns